

Company Name _____

Address 1 _____

Address 2 _____

City _____ State _____ Zip code _____

Contact Name _____

Telephone Number _____

Facsimile Number _____

E-mail address _____

Make copies of this form to transmit your switch requirements. If you have a standard's drawing, please send it along with this fax form.


Step 1. Voltage Class _____ kV Continuous current rating¹: _____ A Momentary current _____ kA

Step 2. Insulator type: ☐ Silicone ☐ Porcelain ☐ One BIL class higher? _____


Step 3. Interrupter type: ☐ ArcHorn ☐ ArcWhip ☐ AmpRupterTM ☐ AmpVacTM

Step 4. Crossarm type: ☐ Galvanized steel ☐ Fiberglass ☐ Aluminum


Step 5. Select the configuration (circle one):



HORIZONTAL Upright Underarm




HORIZONTAL, Center mount

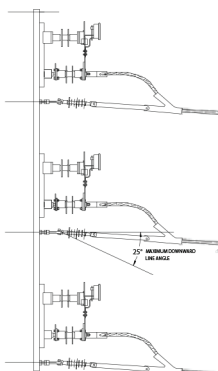


TAP SWITCH


1-Way 2-Way 3-Way

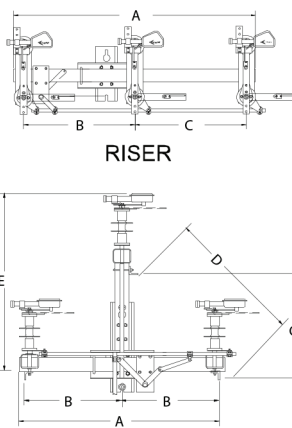

DELTA, Triangular/Pole top

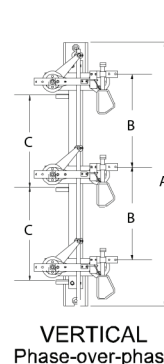

VERTICAL
Phase-over-phase

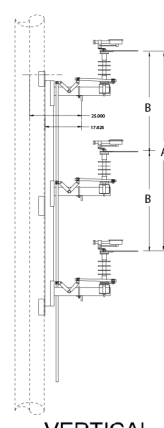

VERTICAL
Tiered outboard

Step 6. Select Spacing:

☐ Standard ☐ Custom (Fill in Spacing Dimensions below using configurations in Step 5.)

A" _____ "B" _____ "C" _____ "D" _____ "E" _____

Step 7. Select the control mechanism:

☐ Hookstick ☐ Reciprocating (↑↓) ☐ Torsional (↻) Clockwise or Counterclockwise to open; viewed looking down on the handle.

Step 8. Select control mechanism quadrant (see fig. 1): _____




Figure 1: Control Quadrants

¹ LineBOSS switches are ANSI rated switches. The LineBOSS Lx6xxxx is rated 600 Amps continuous current per the ANSI C37.30 temperature rise test requirements, and for 900 Amp continuous current per the IEEE 1247 temperature rise test requirements. The LineBOSS Lx9xxxx is rated 900 Amps continuous current per the ANSI C37.30 temperature rise test requirements. The LineBOSS Lx1xxxx is rated 1200 Amps continuous current per the ANSI C37.30 temperature rise test requirements.

Momentary current ratings (10 cycle) are: 600 A (ANSI C37.30) = 40 kA 900 A (ANSI C37.30) = 51 kA 1200 A (ANSI C37.30) = 70 kA

☐ Fiberglass: 1" round 1 $\frac{3}{4}$ " square other _____

Step 10. Select additional accessories and modifications (check off and write in)

- ² Torsional control rods available in 1-1/2" Galvanized Pipe Only.

³ Torsional: N.T.E 50' max.

⁴ Ferrous components come Hot Dipped Galvanized (HDG) standard. Armorgalv AG3000 Thermal Diffusion Galvanizing (TDG) offers increased corrosion resistance.

[illegible]